



GTECH GTSIM101
Desktop Wireless Phone



USER GUIDE

Table of Contents

General Information	1-4
Getting To Know Your Phone	5-6
Installation and Connection	7-8
Using the Phone	9-29

General Information

IMPORTANT INFORMATION ON SAFE AND EFFICIENT OPERATION,
READ THIS INFORMATION BEFORE USING YOUR PHONE.

Safety

Exposure to Radio Frequency (RF) Energy

Your phone contains a transmitter and a receiver. When it is ON, it receives and transmits RF energy. When you communicate with your phone, the system handling your call controls the power level at which your phone transmits.

RF Energy Interference/Compatibility

Nearly every electronic device is susceptible to RF energy interference from external sources if inadequately shielded, designed, or otherwise configured for RF energy compatibility. In some instances your phone may cause interference.

Facilities

- Turn off your phone in any facility where posted notices instruct you to do so. These facilities may include hospitals or health care facilities that may be using equipment that is sensitive to external RF energy.

Medical Devices

- Radio signal transmitted from the unit may cause interference to hearing aids.
- It is recommended that if you have a pacemaker fitted you check with a medical expert before using this product.

General Information (Cont...)

Other

- Radio signal transmitted from the unit may cause interference to electrical equipment, such as TV's, Microwave, Computers etc. It is recommended that the unit be placed at least one meter away from such appliances.

Cleaning

- Make sure the unit is off and the charger is not plugged in before cleaning the unit.
- Use a damp cloth or anti-static wipe to clean. Never use household polish as this may damage the product.

Environmental

- Only use the power supply suitable for the GTEC range. Using an unauthorized power supply will invalidate your warranty and may damage the telephone.
- Do not expose unit to direct sunlight.
- Do not expose the unit to fire, explosive or other hazardous conditions.


Declaration of Conformity

We declare under our sole responsibility that the product detailed in this manual, and in combination with our accessories, conform with the essential requirements and other relevant provisions of Directive 1999/5/EC. Notified body mark for GSM module approval is CE1177.

General Information (Cont...)

Packing List

Included in the box is the following.

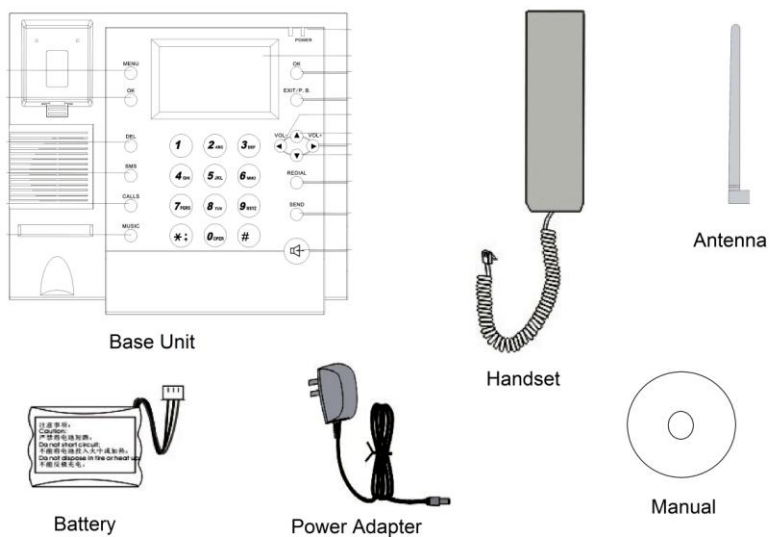


- Base Unit
- Handset and curly cord
- Power Adapter
- Backup Battery
- Antenna
- User Manual.

General Information (Cont...)

Technical Information

Dimensions (W x D x H)	200mm x 175mm x 65mm
Weight	Less than 1.0kg
Mounting Mode	Horizontal
Input Voltage	AC: 220V , 50Hz DC:5V 1000mA
Battery	Type: Li-ion Voltage:3.7V Capacity :1000mAh
Ambient Temperature	- 10°C-55°C
Storage Temperature	-20°C-70°C
Relative Humidity	10%-95%
Working Frequency	GSM 900/1800 Mhz

Getting to Know your Phone

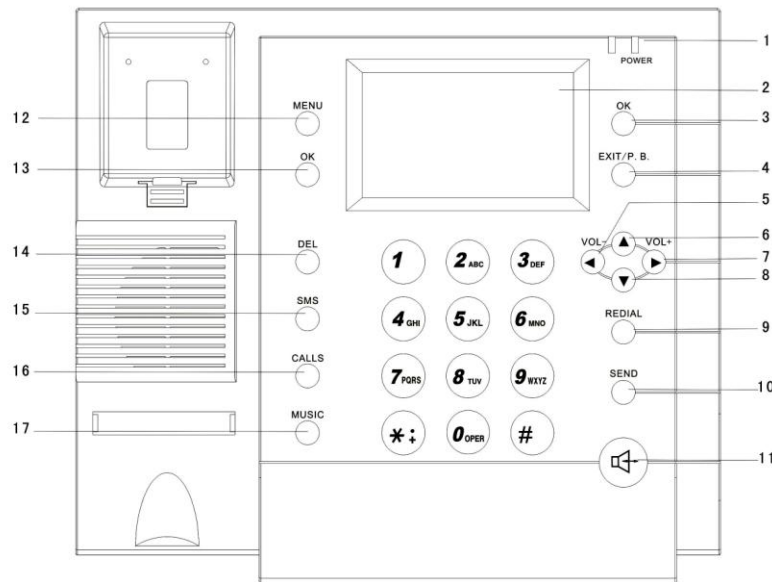

1. POWER LIGHT INDICATOR

2. LCD Display

3. OK Key

In standby mode, press to access the Phone Book. In Menu Mode press to go to the next screen

4. Exit/P.B. Key:

In standby mode, press to access the Phone List. In Menu Mode press to go to the previous screen.

5. ◀(VOL -)

In standby mode, press to access the Tone Setup. In Operational Mode press to adjust the volume down.

Getting to Know your Phone

6. ▲(Up)

In standby mode, press to access the Alarms. In Menu Mode press to scroll up.

7. ▶ (VOL +)

In standby mode, press to access the Tones. In Operational Mode press to adjust the volume up.

8. ▼ (Down)

In standby mode, press to access the Write Messages screen. In Menu Mode press to scroll down..

9. REDIAL

In standby mode/Operational Mode, press to redial the last number.

10. SEND

In standby mode, press to access the Dialed Calls. In Menu Mode press to dial a number.

11. Speaker

In standby mode, press to receive or make calls

12. MENU

In standby mode, press to access the Menu

13. OK

In standby mode, press to access the Phone Book. In Menu Mode press to go to the next screen.

14. DEL

In standby mode, press to access the Phone List. In Menu Mode, press to delete one character at a time.

15. SMS

In standby mode, press to access the Messages.


16. CALLS

In standby mode, press to access the Call History.

17. MUSIC

In standby mode, press to access the Ring Tones.

Installation and Connection

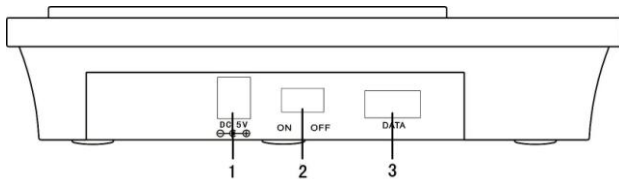

1. Power port
2. On/Off Switch
3. Data Port

Handset Connection

- Connect the handset to the 616 port on the left hand side of the phone.

SIM Card Installation

- Make sure you turn off the phone before installing the SIM.
- Turn the phone over to locate the SIM card slot.
- Insert the SIM into the SIM card slot.

Installation and Connection (Cont...)

External Power Adapter and Antenna Installation

- Screw on the antenna into the antenna socket on the right hand side of the phone.
- Insert the power adapter into the power port labeled **DC 5V**, and plug it into a power source.

Turning the phone On and Off

- Turn the switch to the **ON** position, the display lights up, and the phone begins to search for the appropriate network.
- Turn the switch to the **OFF** position, the display goes off, and the phone is now off.

Using the Phone

Basic Operations

Making a Call

Pick up the handset, and dial the number. Press **SEND**, or wait 3 seconds for the call to connect.

End a Call

Press the **EXIT/P.B** button to abort the call, or just hang up the handset.

Receiving a Call

When you receive a call, the phone rings, and the display shows the incoming call number. Pick up the handset or press the Speaker button twice to receive the call.

Handset Receiver Volume

During a call, you can adjust the volume of the handset receiver by pressing ◀(-) to reduce the volume or (+)▶ to increase it.

Handsfree

Handsfree lets you talk to a caller without holding the handset. It also enables other people to participate in the conversation.

Make a call using handsfree

To make a call using hands free, press the speaker button, the speaker icon is displayed, and you hear your call over the loudspeaker.

Receive a call using handsfree

To receive a call using hands free, press the speaker button twice. The call is then transferred to the loudspeaker.

Using the Phone (Cont...)

Switch to handsfree during a call

During a call press the speaker button, the speaker icon is displayed, and you hear your call over the loudspeaker. To switch the handsfree off, and return to the handset at anytime, just pick up the handset, or press the speaker button again to end the call.

Redial

Pick up the handset and press the **REDIAL** button, the last number dialed will be redialed

Placing a Call on Hold

During a call, you have the option to do the following. Press OK and scroll to choose from.

- Hold
- End
- Mute

Hold

1. Press **OK** to place the call on hold, the display shows **Call Held**, and the call is placed on hold. Press **OK** again and select **Retrieve** to take the call off hold.

End

1. Press **OK** to end the call, the display shows **Call Ended** and the call is disconnected.

Mute

1. Press **OK** to mute the microphone. Press **OK** again to take it off mute.

Using the Phone (Cont...)

Menu Operations

1. Phone Book

You can store up to 100 names and numbers in the Phonebook, names can be up to 16 characters long and numbers up to 30 digits.

Search Entry

2. Press **MENU** and then **1** to proceed to the **Search Entry** option in the Phone Book screen.
3. Press **OK** to proceed.
4. To search for an entry in the Phone Book, you can input a name and press **OK**. If more than one entry appears, you can use the **▲▼** buttons to traverse through the entries to find the one you want.
5. Press **OK** to get into the submenus. You have the following options to choose from.
 - View
 - Edit
 - Delete
 - Copy
 - Move
 - Send Message

View (Check details of an entry)

1. Press **OK** to display the details of the entry selected.

Edit (Edit entry details)

1. Press **OK** to display the details of the entry.
2. Use the **▲▼** buttons to select the entry you wish to edit and press **OK** to make the change

Using the Phone (Cont...)

Delete (Delete an Entry)

1. Press **OK** to delete the entry selected, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Copy (Copy an Entry from SIM to Phone or Phone to SIM)

1. Press **OK** to copy the entry selected, the display shows **Copy?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Move (Move an Entry from SIM to Phone or Phone to SIM)

1. Press **OK** to move the entry selected, the display shows **Move?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Send Messages

1. Press **OK** to send a message to the entry selected. Enter a message of up to 512 characters and press **OK**. You are then presented with the following options. 1. **Send Only** 2. **Save and Send** 3. **Save**.
2. Use the **▲▼** buttons to select the appropriate option, and press **OK** to send the message.

Add New Entry

1. Select the **Add New Entry** option in the Phone Book screen, and press **OK** to proceed.
2. Choose from the **To SIM** or **To Phone** option and press **OK**.
3. Select the **<Name>** option and press **OK** to enter a name.
4. Type in the name and press **OK**, scroll to **<Number>** and press **OK** to enter a number.
5. Press **Exit/P.B.** to save details, the display shows **Save?** Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Follow the same procedure to save the corresponding number entry.

Using the Phone (Cont...)

Delete All

1. Press **OK** to delete all entries.
2. Choose from the **From SIM** or **From Phone** option and press **OK**.
3. **Delete Phone?** or **Delete SIM?** is displayed, depending on the option selected previously.
4. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Copy All

1. Press **OK** to copy all entries.
2. Choose from the **From SIM** or **From Phone** option and press **OK**.
3. **Copy Phone?** or **Copy SIM?** is displayed, depending on the option selected previously.
4. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Memory Status

This displays the number of entries on the SIM and on the phone.

Using the Phone (Cont...)

2. Messages

You can save and receive up to 100 messages on the phone. Received messages are stored in the **INBOX**, and the **Save and Send**, and **Save** messages are stored in the **OUTBOX**.

Write Message

1. Press **MENU** and then **2** to proceed to the **Write Message** option in the **Messages** screen.
2. Press **OK** to proceed.
3. Compose a message, of up to 612 characters and press **OK**. You are then presented with the following options. 1. **Send Only** 2. **Save and Send** 3. **Save** 4. **Send To Many**.
4. Use the **▲ ▼** buttons to select the appropriate option, and press **OK** to proceed.
5. Enter the number or search for the recipient in the phone book, and press **OK** to send.

Inbox

Use the **▲ ▼** buttons to select the message to read and Press **OK**. You will be presented with the following options.

- Forward
- Reply
- Delete
- Edit
- Use Number

Using the Phone (Cont...)

Forward (Send message to others)

1. Press **OK** to forward the message, you will be presented with the following options. 1. **Send Only** 2. **Save and Send** 3. **Save**.
2. Use the **▲▼** buttons to select the appropriate option, and press **OK** to proceed.
3. Enter the number or search for the recipient in the phone book, and press **OK** to send.

Reply (Reply to a message)

1. Press **OK** to compose a reply.
2. Press **OK** again, **Reply?** is displayed
3. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Delete (Delete a message)

1. Press **OK** to delete the entry selected, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Edit (Update message to send)

1. Press **OK** to edit an existing message.
2. Press **OK** again, and you will be presented with the following options. 1. **Send Only** 2. **Save and Send** 3. **Save**.
3. Use the **▲▼** buttons to select the appropriate option, and press **OK** to proceed.
4. Enter the number or search for the recipient in the phone book, and press **OK** to send.

Use Number (Dial or Save the number)

1. Press **OK** to dial or save the number.
2. Choose from the **Dial** or **Save** option. Dial will call the number, Save allows you to choose from the following options, **To SIM** or **To Phone**.
3. Select the **Name** option and press **OK** to enter a name.
4. Type in the name and press **OK**, press **Exit/P.B.**, **Save?** is displayed

Using the Phone (Cont...)

5. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Outbox

Use the **▲▼** buttons to select the message to read and Press **OK**. You will be presented with the following options.

- Send
- Edit
- Delete
- Use Number

Send (Send a message)

1. Press **OK** to send a message and you will be presented with the following options. 1. **Send Only** 2. **Send to Many**.
2. Use the **▲▼** buttons to select the appropriate option, and press **OK** to proceed.
3. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Edit (Update message to send)

1. Press **OK** to edit an existing message.
2. Press **OK** again, and you will be presented with the following options. 1. **Send Only** 2. **Save and Send** 3. **Save**.
3. Use the **▲▼** buttons to select the appropriate option, and press **OK** to proceed.
4. Enter the number or search for the recipient in the phone book, and press **OK** to send.

Delete (Delete a message)

1. Press **OK** to delete the entry selected, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Using the Phone (Cont...)

Use Number (Dial or Save the number)

1. Press **OK** to dial or save the number.
2. Choose from the **Dial** or **Save** option. Dial will call the number, Save allows you to choose from the following options, **To SIM** or **To Phone**.
3. Select the **Name** option and press **OK** to enter a name.
4. Type in the name and press **OK**, press **Exit/P.B.**, and **Save?** is displayed.

Delete

Use the **▲ ▼** buttons to select the **Delete** option and Press **OK**. You will be presented with the following options.

- Delete Inbox
- Delete Outbox
- Delete All

Delete Inbox (Delete all inbox messages)

1. Press **OK** to delete all inbox entries, the display shows **Delete All Inbox?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Delete Outbox (Delete all outbox messages)

1. Press **OK** to delete all outbox entries, the display shows **Delete all Outbox?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Delete All (Delete all messages)

1. Press **OK** to delete all outbox entries, the display shows **Delete all Messages?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Using the Phone (Cont...)

Message Settings

Use the **▲ ▼** buttons to select the **Message Settings** option and Press **OK**. You will be presented with the following options.

- Profile Setting
- Common Setting

Memory Status

This displays the number of message entries on the SIM and on the phone.

Using the Phone (Cont...)

3. Call History

The call history holds up to **10 Missed Calls**, **10 Dialed Numbers** and **10 Received Calls**. Calls are all stored in the order they were received or dialed.

Missed Calls

1. Press **MENU** and then **3** to proceed to the **Missed Calls** option in the **Call History** screen.
2. Press **OK** to display the list of Missed Calls.
3. Use the **▲▼** buttons to select the call from the list, and press **OK**. Details of the missed call are displayed. Press **OK** again and you will be presented with the following options.

- Delete
- Save
- Dial
- Edit

Delete (Delete an entry from missed calls)

1. Press **OK** to delete the entry selected, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Save (Save an entry from missed calls)

1. Press **OK** to save the number, you can choose from the following options, **To SIM** or **To Phone**, select the appropriate option and press **OK**
2. Select the **Name** option and press **OK** to enter a name.
3. Type in the name and press **OK**, press **Exit/P.B.**, **Save?** is displayed.
4. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Using the Phone (Cont...)

Dial (Dial a number in the list)

1. Press **OK** to dial.

Edit (Update message to send)

1. Press **OK** to edit the existing number.
2. Choose from the **To SIM** or **To Phone** option and press **OK**.
3. Select the **Name** option and press **OK** to enter a name.
4. Type in the name and press **OK**, press **Exit/P.B.**, and **Save?** is displayed.
5. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Dialed Calls

1. Use the **▲▼** buttons to select the **Dialed Calls** option in the **Call History** screen and press **OK**, this will display the list of Dialed Calls.
2. Use the **▲▼** buttons to select the call from the list, and press **OK**. Details of the dialed call are displayed. Press **OK** again and you will be presented with the following options.

- Delete
- Save
- Dial
- Edit

Delete (Delete an entry from dialed calls)

1. Press **OK** to delete the entry selected, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Using the Phone (Cont...)

Save (Save an entry from dialed calls)

1. Press **OK** to save the number, you can choose from the following options, **To SIM** or **To Phone**, select the appropriate option and press **OK**
2. Select the **Name** option and press **OK** to enter a name.
3. Type in the name and press **OK**, press **Exit/P.B.**, **Save?** is displayed.
4. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Dial (Dial a number in the list)

1. Press **OK** to dial.

Edit (Update message to send)

1. Press **OK** to edit the existing number.
2. Choose from the **To SIM** or **To Phone** option and press **OK**.
3. Select the **Name** option and press **OK** to enter a name.
4. Type in the name and press **OK**, press **Exit/P.B.**, and **Save?** is displayed.
5. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Received Calls

1. Use the **▲▼** buttons to select the **Received Calls** option in the **Call History** screen and press **OK**, this will display the list of Received Calls.
2. Use the **▲▼** buttons to select the call from the list, and press **OK**. Details of the received call are displayed. Press **OK** again and you will be presented with the following options.

- Delete
- Save
- Dial
- Edit

Using the Phone (Cont...)

Delete (Delete an entry from received calls)

1. Press **OK** to delete the entry selected, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Save (Save an entry from received calls)

1. Press **OK** to save the number, you can choose from the following options, **To SIM** or **To Phone**, select the appropriate option and press **OK**
2. Select the **Name** option and press **OK** to enter a name.
3. Type in the name and press **OK**, press **Exit/P.B.**, **Save?** is displayed.
4. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Dial (Dial a number in the list)

1. Press **OK** to dial.

Edit (Update message to send)

1. Press **OK** to edit the existing number.
2. Choose from the **To SIM** or **To Phone** option and press **OK**.
3. Select the **Name** option and press **OK** to enter a name.
4. Type in the name and press **OK**, press **Exit/P.B.**, and **Save?** is displayed.
5. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Delete Call Log

Use the **▲▼** buttons to select the **Delete Call Log** option and Press **OK**. You will be presented with the following options.

- Missed Calls
- Dialed Calls
- Received Calls
- Delete All

Using the Phone (Cont...)

Missed Calls (Delete all missed calls)

1. Press **OK** to delete all missed call entries, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Dialed Calls (Delete all dialed calls)

1. Press **OK** to delete all dialed call entries, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Received Calls (Delete all received calls)

1. Press **OK** to delete all received call entries, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Delete All (Delete all calls)

1. Press **OK** to delete all call entries, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Call Time

Use the **▲ ▼** buttons to select the **Call Time** option and Press **OK**. You will be presented with the following options.

- Last Call Time
- Total Sent
- Total Received
- Reset All Time

Last Call Time

1. Press **OK** to display details of the last call time.

Using the Phone (Cont...)

Total Sent

1. Press **OK** to display details of the total calls made.

Total Received

1. Press **OK** to display details of the total calls received.

Reset All Time

1. Press **OK** to delete all call entries, the display shows **Delete?**
2. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

.

4. Settings

Allows you to set the Date/Time, Alarms, Phone Setup, Owner Information etc.

Alarm

1. Press **MENU** and then **4** to proceed to the **Alarm** option in the **Settings** screen.
2. Press **OK** to proceed with setting the alarm.
3. Use the **▲ ▼** buttons to select any of the 4 alarm options and Press **OK**.
4. Press **OK** to select the frequency of the alarm, **Off**, **Once** or **Every Day**.
5. Use the **▲ ▼** buttons to select the time field and press **OK** to change.
6. Set the time and press **Exit/P.B** to save settings, the display shows **Save?**
7. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Using the Phone (Cont...)

Set Time/Date

1. Press **OK** to proceed with setting the Time and Date.
2. Use the **▲▼** buttons to select the Time or Date option and press **OK**.
3. Set the Time or Date and press **OK**, press **Exit/P.B.** to save settings, the display shows **Save?**
4. Press **OK** (Yes) to proceed or **Exit/P.B.** (No) to abort.

Phone Setup

The phone setup allows you to setup the following.

- Language
- Volume
- Tone Setup
- Greeting Text
- LCD Backlight
- Restore Factory Set
- Contrast

Language

1. Press **OK** to choose from English or Chinese.
2. Use the **▲▼** buttons to select the appropriate language and press **OK** to set the language.

Volume

1. Press **OK** to choose from **Ring Tone** or **Key Tone** volume.
2. Use the **▲▼** buttons to select the appropriate option and press the **◀(-)** to reduce the volume or **(+)▶** to increase it, and press **OK**. The volume is now set.

Using the Phone (Cont...)

Tone Setup

1. Press **OK** to choose from the following.
 - Incoming
 - Alarm
 - Power On
 - Power Off
 - Message Tone
 - Keypad Tone
2. Use the **▲▼** buttons to select from any of the above options and press **OK**.
3. Use the **▲▼** buttons to select from any of the 12 tones and press **OK**. The tone is now set.

Greeting Text

1. Press **OK** to enter a welcome text.
2. Press **OK** to save.

LCD Backlight

1. Press **OK** to set the backlight fade.
2. Use the **▲▼** buttons to select the appropriate time delay and press **OK** to set the delay.

Restore Factory Set

1. Press **OK** to reset the device back to factory defaults.
2. Enter the following password “1122” when prompted and press “**OK**” to proceed.

Contrast

1. Press **OK** to change the contrast.

Using the Phone (Cont...)

2. Use the ◀(-) to reduce the contrast or (+)▶ to increase it, and press **OK**. The contrast is now set.

Owner Number

1. Press **OK** to set the owner number, this will appear as the Call ID on the receivers phone.

Auto Call

1. Press **OK** to set the auto call delay, choose from 3 to 12 seconds and press **OK** to set the delay time.

Speed Dial

1. Press **OK** to set the speed dials for up to 9 numbers. You will be presented with the following options.

- Enable Speed Dial
- Set Number

2. Press **OK** to toggle between On and Off for the Enable Speed Dial option.
3. Select Set Number, and Press **OK**, select an Empty field and press **OK** to edit. Press **OK** again and type in or search for a number from the **Phone Book**.
4. Press **OK** to set the speed dial number.

Security Setup

1. Press **OK** to set the **SIM Lock** or **Change Pwd**.
2. Press **OK** to toggle between On and Off for the SIM Lock.

Using the Phone (Cont...)

3. Call Service

The Call Service allows you to set the following.

- **Network Selection**
- **Band Selection**
- **Call Divert**
- **Call Waiting**

Network Selection

1. Press **MENU** and then **5** to proceed to the **Network Selection** option in the **Call Service** screen.
2. Press **Ok** to choose between **Automatic** and **Manual** Network Selection.
3. **Manual** allows you to choose from available networks, it is suggested that you leave the setting to **Automatic**

Band Selection

1. Press **OK** to choose from the following.
 - 850
 - 900
 - 1800
 - 1900
 - Auto Band
2. Use the ▲▼ buttons to select from any of the above options and press **OK** to save the band selection.

Using the Phone (Cont...)

Call Divert

1. Press **OK** to choose from the following Call Diversion options.
 - All Voice Calls
 - If Unreachable
 - If No Answer
 - If Busy
 - All Data Calls
 - Cancel All Divert

To set any of the above Call Diversions, follow the following steps.

1. Press OK to choose from Activate, Deactivate or Query Status.
2. To Activate press **OK**, and enter or search the number you wish to divert to.
3. Select the number and press OK. Press OK again to confirm the diversion.
4. To Deactivate, select Deactivate and press OK to confirm the deactivation.

Call Waiting

1. Press OK to choose from Activate, Deactivate or Query Status.
2. To Activate Call Waiting, press **OK**, the display shows **Call Waiting Activated for All Teleservices**
3. To Deactivate, select Deactivate and press OK to confirm the deactivation, the display shows **Call Waiting Deactivated for All Teleservices**
4. Query Status shows you if Call Waiting is Activated or Deactivated.